

SERIE FOSSIL

OUTDOOR 20
INDOOR 10



IN & OUT

PORCELÁNICO/PORCELAIN
7,5X30/3"X12"

SERIE FOSSIL

Superficies atemporales Para espacios contemporáneos

El carácter natural de la piedra, reinterpretado para la arquitectura actual.

La serie **Fossil** combina una textura rica y expresiva con la calidez de la piedra natural y las prestaciones del porcelánico.

Su característico acabado *pillow edge* aporta suavidad y relieve al formato 7,5X30CM, creando sutiles juegos de luz y sombras que realzan la naturalidad de cada pieza. Disponible en espesores de 10MM y 20MM, **Fossil** ofrece múltiples posibilidades para crear superficies con textura, profundidad y personalidad.

Timeless surfaces For contemporary spaces

The natural character of stone, reimagined for today's architecture.

The **Fossil** series combines a rich, expressive texture with the warmth of natural stone and the performance of porcelain.

Its distinctive *pillow edge* brings softness and relief to the 7,5X30CM format, creating subtle plays of light and shadow that enhance the natural character of each piece. Available in 10MM and 20MM thicknesses, **Fossil** offers multiple possibilities for creating surfaces with texture, depth and personality.



SERIE FOSSIL

Fossil Bone 7,5 x 30 cm/ 3"x 12"



16 diseños diferentes / 16 different designs

Fossil Bone 10mm M-175

MATT


IN & OUT


1 CM


B1a


FROST PROOF


JUNTA MÍNIMA
MINIMAL JOINT


V3


HIGLY
RESIS TANT


R10-B


PORCELAIN


2

Fossil Bone 20mm M-320

MATT


IN & OUT


2 CM


B1a


FROST PROOF


JUNTA MÍNIMA
MINIMAL JOINT


V3


HIGLY
RESISTANT


R11-C


PORCELAIN


3



Pillow edge



Fossil Bone 10mm, 7,5 x 30 cm/3"x 12"



Fossil Bone 10mm, 7,5 x 30 cm/3"x 12"



Fossil Bone 20mm, 7,5 x 30 cm/3"x 12"



Fossil Bone 20mm, 7,5 x 30 cm/3"x 12"

SERIE FOSSIL

Fossil Greige 7,5 x 30 cm/ 3"x 12"



16 diseños diferentes / 16 different designs

Fossil Greige 10mm M-175

MATT


IN & OUT


1 CM


B1a


FROST PROOF


JUNTA MÍNIMA
MINIMAL JOINT


V3


HIGLY
RESIS TANT


R10-B


PORCELAIN


2

Fossil Greige 20mm M-320

MATT


IN & OUT


2 CM


B1a


FROST PROOF


JUNTA MÍNIMA
MINIMAL JOINT

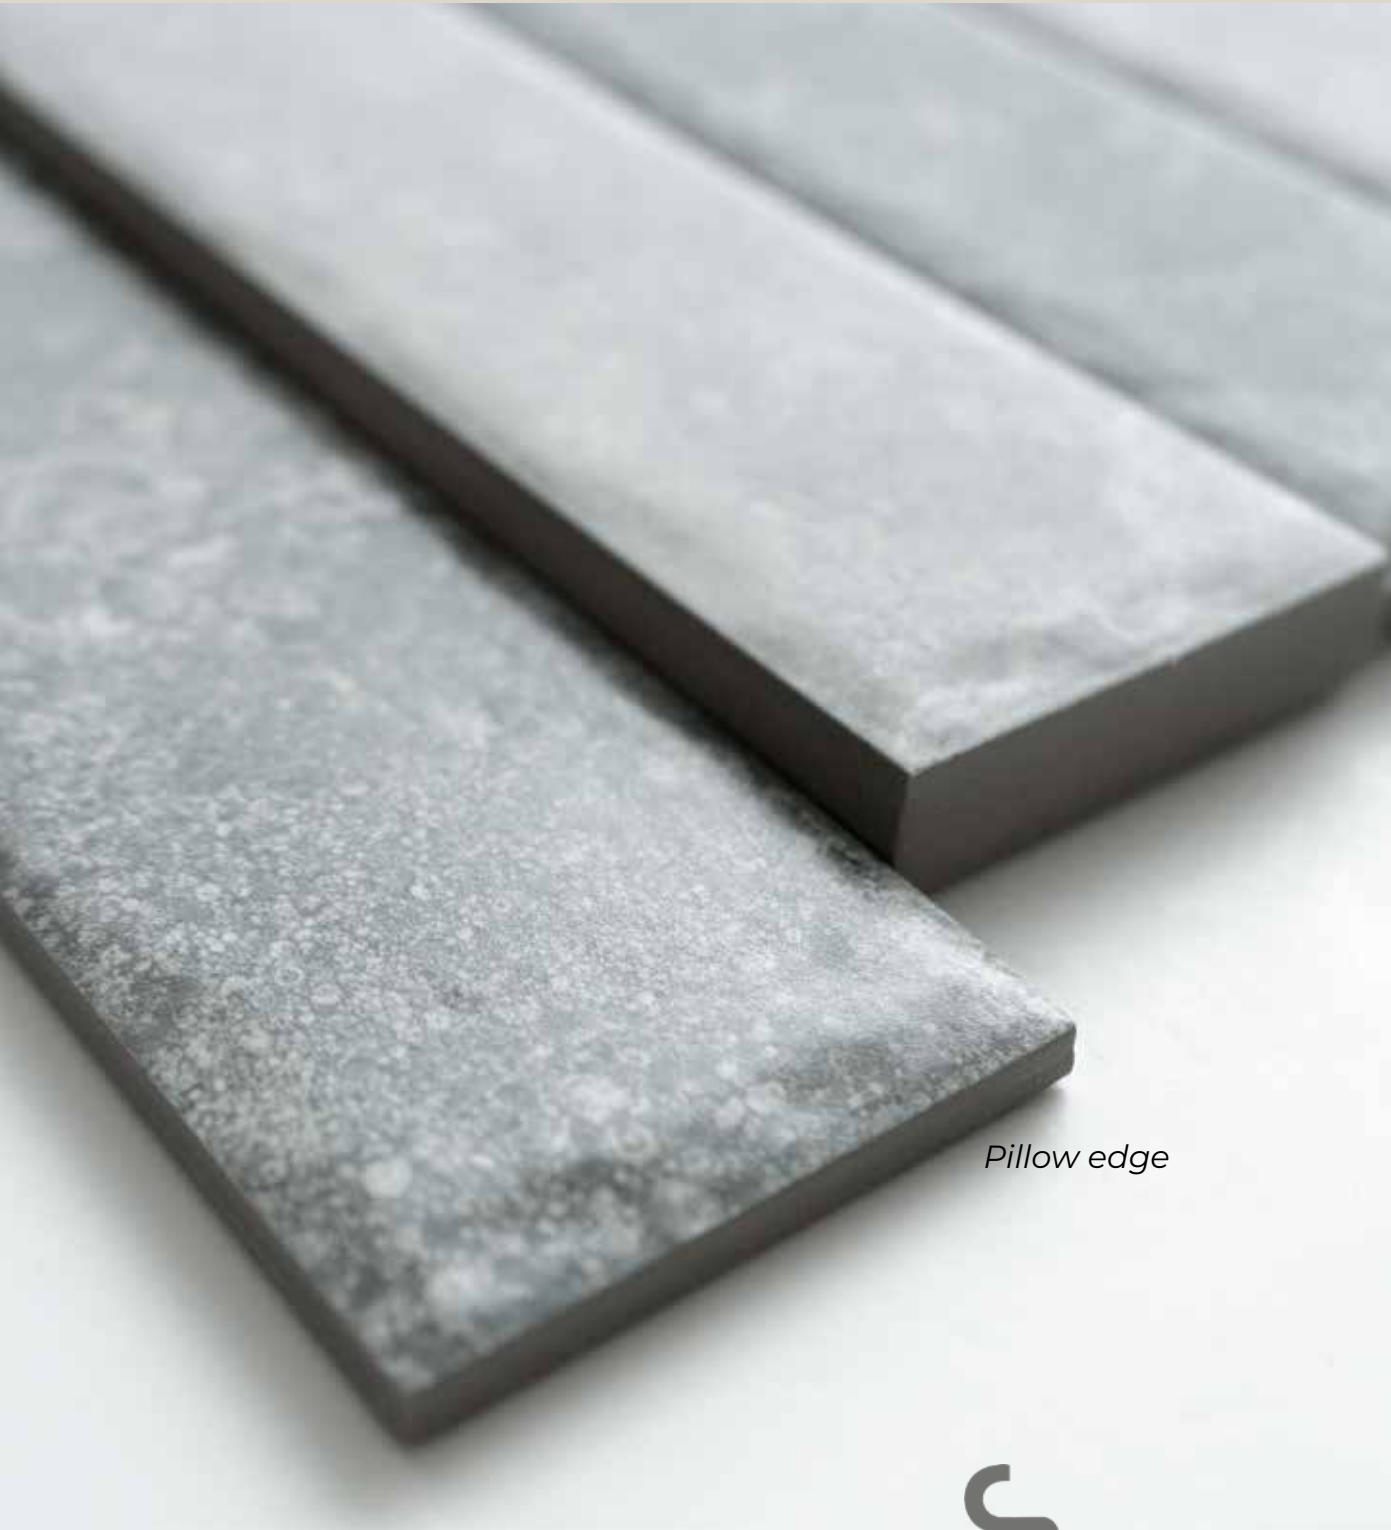

V3


HIGLY
RESISTANT


R11-C


PORCELAIN


3



Pillow edge



Fossil Greige 10mm, 7,5 x 30 cm/3"x12"



Fossil Greige 10mm, 7,5 x 30 cm/3"x12"



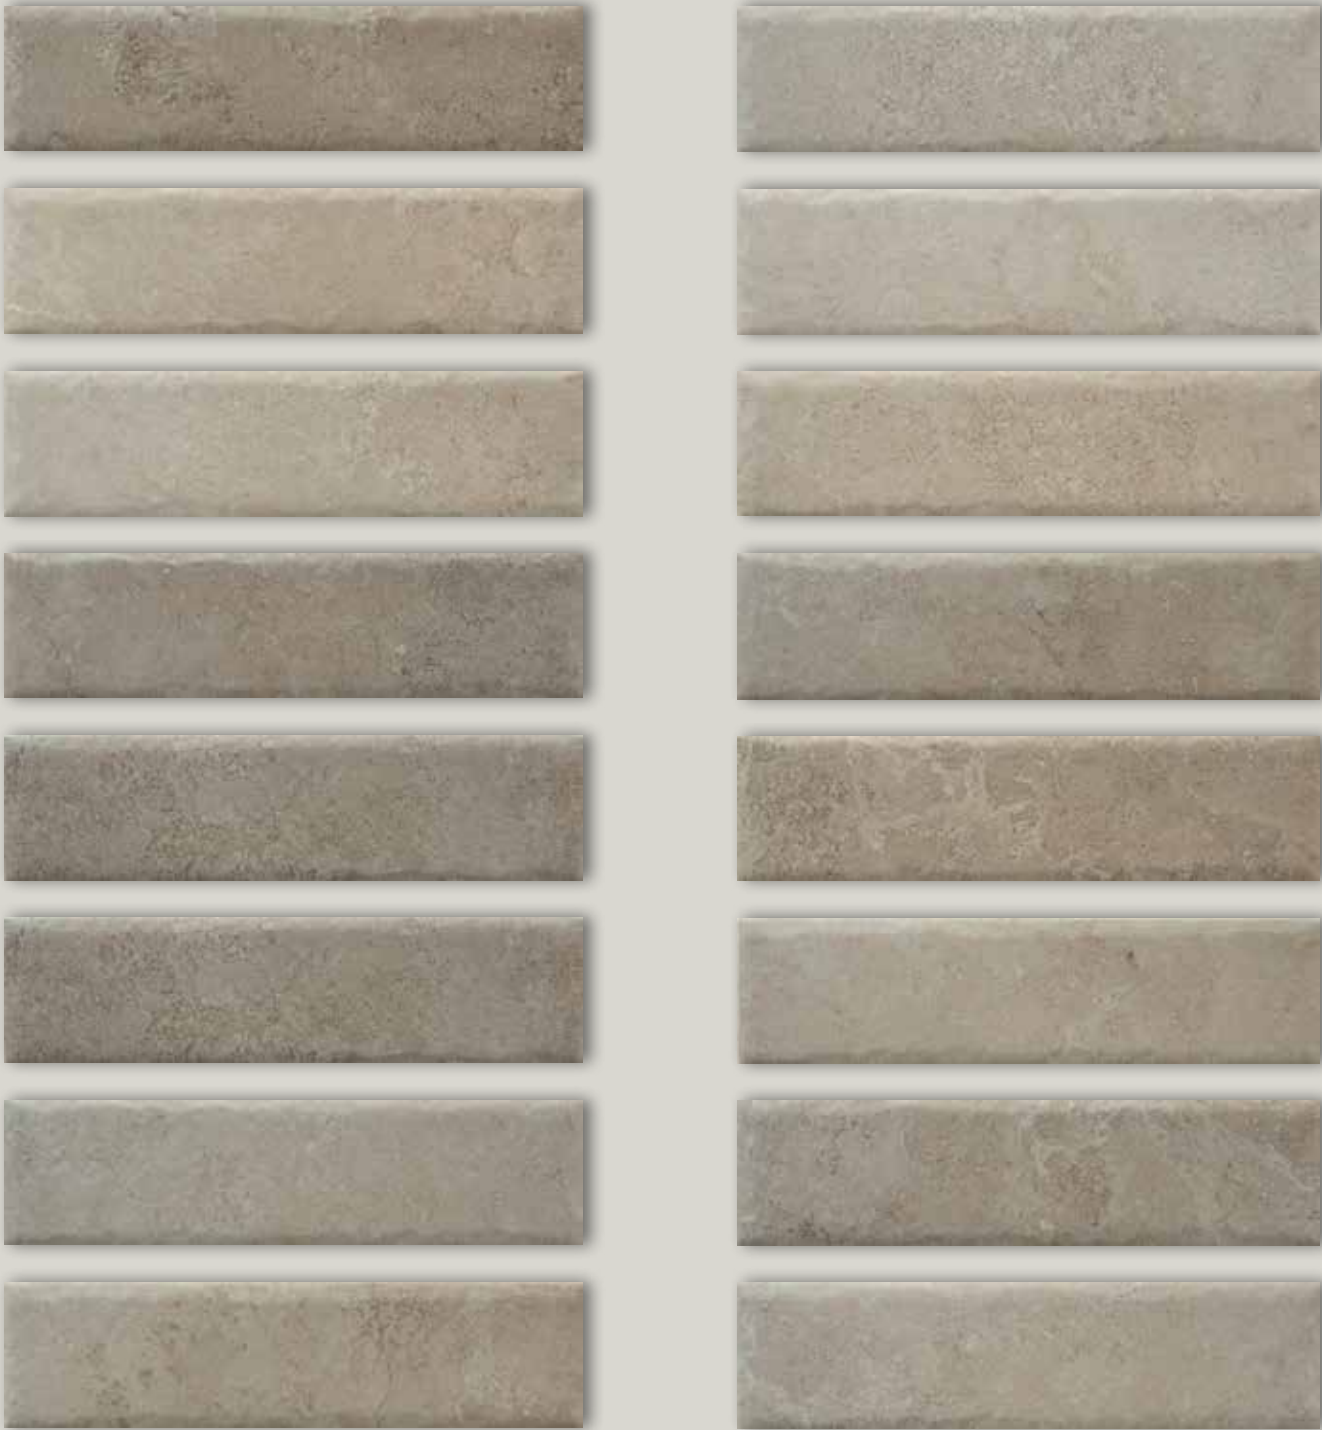
Fossil Greige 20mm, 7,5 x 30 cm/3"x12"



Fossil Greige 20mm, 7,5 x 30 cm/3"x12"

SERIE FOSSIL

Fossil Nature 7,5 x 30 cm/ 3"x 12"



16 diseños diferentes / 16 different designs

Fossil Nature 10mm M-175

MATT


IN & OUT


1 CM


B1a


FROST PROOF


JUNTA MÍNIMA
MINIMAL JOINT


V3


HIGLY
RESIS TANT


R10-B


PO
PORCELAIN


2

Fossil Nature 20mm M-320

MATT


IN & OUT


2 CM


B1a


FROST PROOF


JUNTA MÍNIMA
MINIMAL JOINT


V3


HIGLY
RESISTANT


R11-C


PO
PORCELAIN

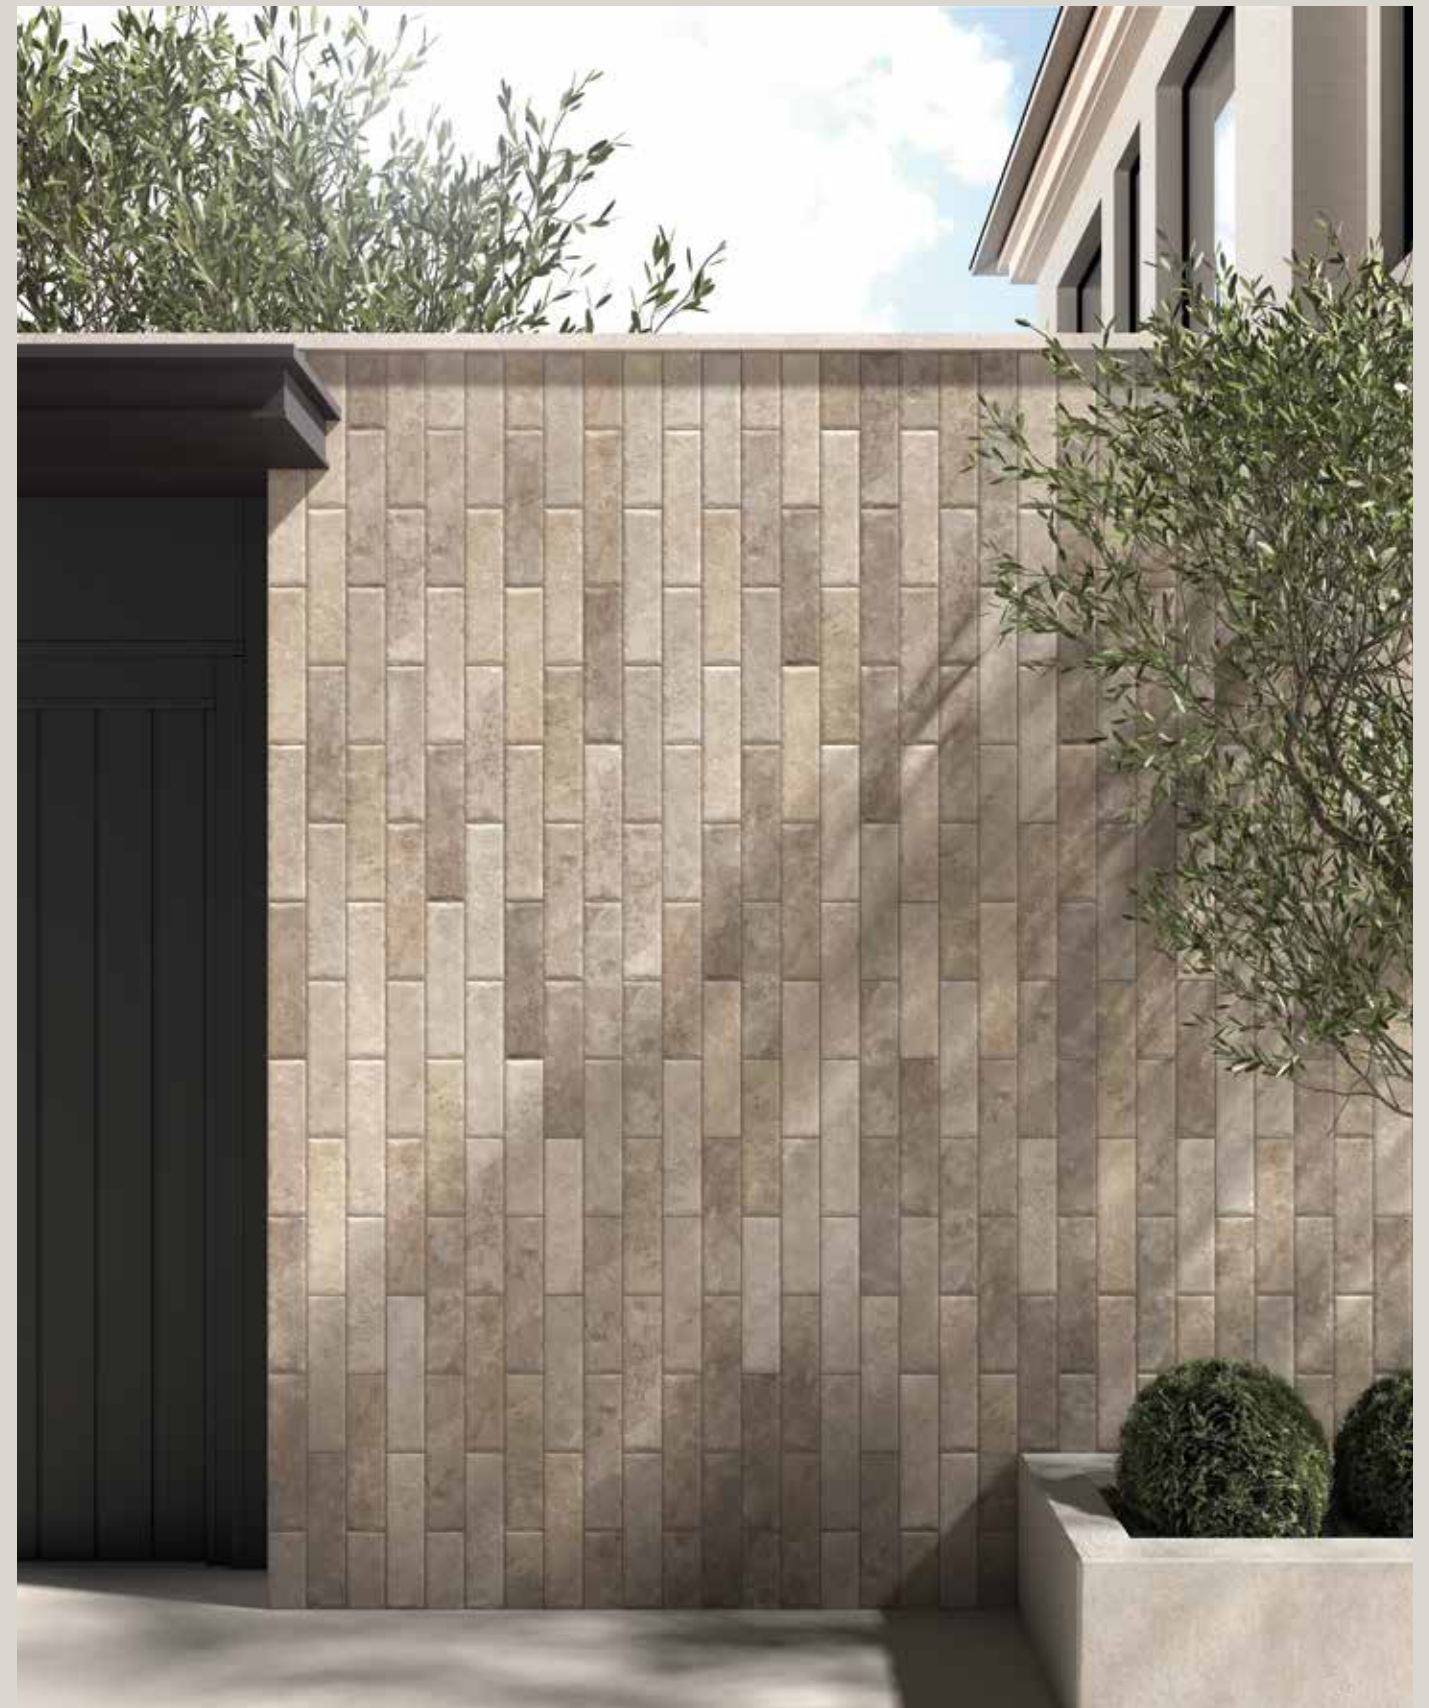

3



Pillow edge



Fossil Nature 10mm, 7,5 x 30 cm/3"x12"



Fossil Nature 10mm, 7,5 x 30 cm/3"x12"



Fossil Nature 20mm, 7,5 x 30 cm/3"x12"



Fossil Nature 20mm, 7,5 x 30 cm/3"x12"

EMBALAJE / PACKING LIST

Porcelánico/ Porcelain Tiles

FORMATO / SIZE cm / inhces	CAJAS / BOXES			PALLET		
	Pzas./ Pces	m2aprox	Kgs.	Cajas / Boxes	m2aprox	Kgs.
7,5x30cm 10mm /3"x12"	36	0,81818	17,71	64	52,36364	1133,57
7,5x30cm 20mm /3"x12"	18	0,40909	17,71	64	26,18182	1133,57

CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS

CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS		Características esenciales Essential Characteristics Características essentielles	Prestaciones Performance Performance	Especificación técnica armonizada Harmonized technical specification Spécification technique harmonisée
DECLARACIÓN DE PRESTACIONES /DECLARATION OF PERFORMANCE /DÉCLARATION DE PERFORMANCE Nº: 004		Reacción al fuego Reaction to fire Réaction au feu	A1 /A1 _{FL}	EN 14411:2016
1 Código de identificación única del producto tipo Unique identification code of the product type Le code d'identification unique du type de produit		Emisión de sustancias peligrosas Release of dangerous substances Émission de substances dangereuses		
Baldosa cerámicas prensadas en seco, con absorción de agua E ≤ 0,5 Dry-pressed ceramic tyles, with water absorption E ≤ 0,5% Carreaux céramiques pressés à sec, à absorption d'eau E ≤ 0,5%		Cadmio Cadmium Cadmiium	PND / NPD	
		Plomo Lead Plomb	PND / NPD	
2 Uso o usos previstos Intented use(s) Utilisation(s) prévúe(s)		Fuerza de rotura Breaking strength Force de rupture	> 1300 N	
Para suelos y paredes interiores For interior floor and walls Pour les sols et les murs intérieur		Deslizamiento Slip resistance Résistance a la glissance	PND / NPD	
3 Marca registrada y dirección del fabricante Trade mark and contact addres Marque et l'adresse du fabricant		Adhesión Bond strength adhesion: Adhésif a base de ciment type C1		
		Adhesivo cementoso tipo C1 Cementitious adhesive type C1 Adhésif à base de ciment type C1	> 1 N/mm 2	
Cerámica Ribesalbes S.A., Ctra. Onda-Ribesalbes, Km. 3,3 12200 Onda (Castellón) - ESPAÑA		Durabilidad para / Durability for /Durabilité pour		
4 Sistema de evaluación y verificación de la constancia de prestaciones. System of assessment and verification of constancy of performance. Système d'évaluation et de vérification de la constance des performances		Usos interiores Interior applications Applications intérieures	Cumple /Comply/Conforme	
Sistema 4 / System 4 / Système 4		Propiedades táctiles Tactile properties Propriétés tactiles	PND / NPD	

Ctra Onda-Ribesalbes , Km 3,3. 12200.
ONDA (Castellón) SPAIN

www.ceramicaribesalbes.com